



# MOSS

## AREAS OF APPLICATION

Shops • Cafes • Restaurants • Offices • Training Halls • Hospitals • Factories • Facility  
Suitable for use in the areas requiring long-lasting and high lumen lighting.



# MOSS

## 6"


RECESSED LED DOWNLIGHT LUMINAIRE




### PRODUCT SPECIFICATIONS

- Body** : Aluminum Body and Circle / RAL9003
- Optic Cover** : PMMA and PS Opal Diffuser
- Driver** : Osram-Tridonic-Philips-3N
- Led Chip** : Samsung, Osram, Seoul
- Input Voltage** : 220-240V/AC 50-60Hz
- Temperature Range** : -10°C~+40°C
- CRI** : CRI > 80
- IP Class** : IP40
- Options** : Application Options : Recessed/Surface Mounted  
Color Temperature: 3000K/4000K/6500K  
Emergency Kit - DALI


PHOTOMETRIC DISTRIBUTION

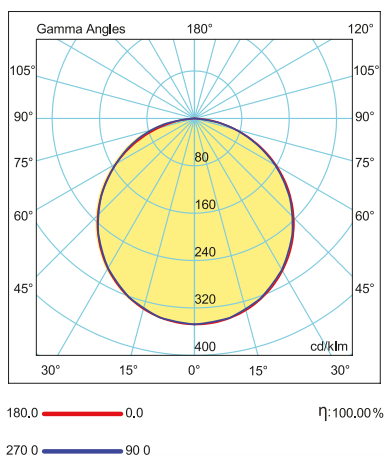

TECHNICAL DRAWING

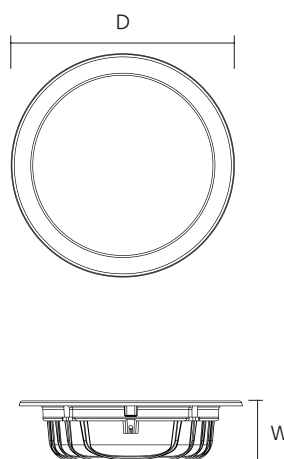

PLASTER CEILING HOLE SIZE

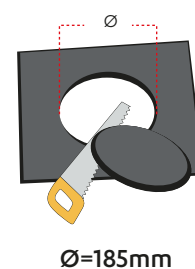

### PRODUCT SPECIFICATIONS

Item Code	Power (W)	Luminaire Lumen (lm)	Color Temperature (K)	Efficiency (lm/W)	Dimensions (LxWxH)	Cut Size (Ø)	Qty/Carton	Carton Size (LxWxH)	G.W/Carton
LDL10.021	21W	2.100	3000/4000/6500	100lm/W	205x50mm	185mm	12	210x440x420mm	5.45 kg
LDL10.024	24W	2.400	3000/4000/6500	100lm/W	205x50mm	185mm	12	210x440x420mm	5.45 kg

\*3N Company has the right to make any changes it deems necessary without prior notice.  
\*Technical data has a tolerance of ± 10%.