



# RECESSED MOUNTED SPOT LIGHT

## AREAS OF APPLICATION

Housing • Offices • Shops • Markets • Cafes • Restaurant • Hospitals • Training Halls  
It can be used in areas requiring long life and high illumination.





# ASYA-115

RECESSED MOUNTED SPOT LIGHT



## PRODUCT SPECIFICATIONS

<b>Body</b>	: Alu Body /RAL9005
<b>Optic Cover</b>	: Alu Reflector
<b>Led Driver</b>	: Osram-Tridonic-Philips
<b>Led Chip</b>	: Samsung, Osram, COB
<b>Input Voltage</b>	: 220-240V/AC 50-60Hz
<b>Operating Temperature</b>	: -10°C~+40°C
<b>CRI</b>	: CRI > 80, 90
<b>IP Class</b>	: IP20
<b>Options</b>	: Body Color Options: RAL9016 Application Options: Recessed Mounted Color Temperature : 2700K/3000K/4000K/6500K DALI

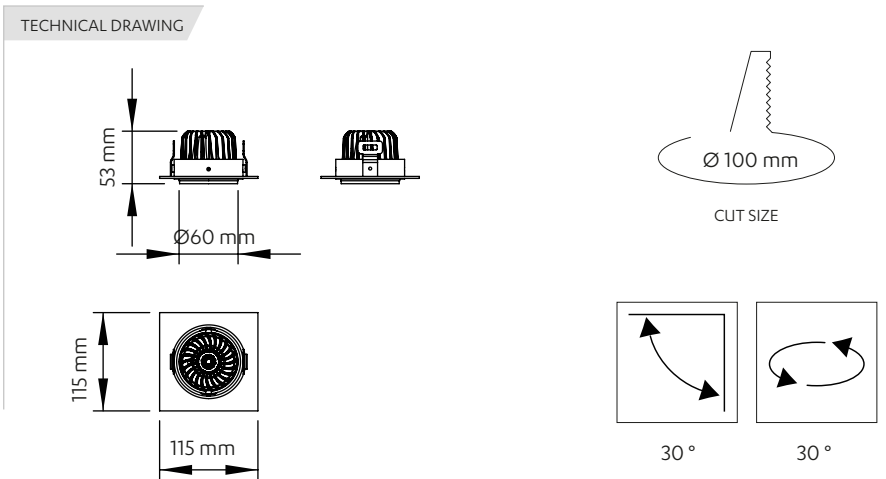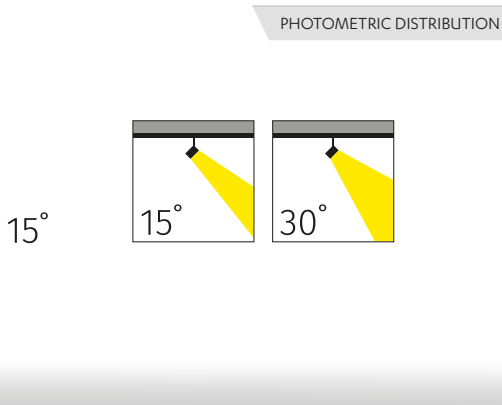

## PRODUCT SPECIFICATIONS

Item Code	Power (W)	Luminaire Lumen (lm)	Color Temperature (K)	Efficiency (lm/W)	Dimensions (LxWxH)	Qty/Carton	Carton Size (LxWxH)	G.W/Carton
LRS10.008	8W	704	2700/3000/4000/6500	88lm/W	115x115x53mm	60	400x500x460mm	22.50 kg
LRS10.010	10W	880	2700/3000/4000/6500	88lm/W	115x115x53mm	60	400x500x460mm	22.50 kg
LRS10.005-GU10	5W	460	2700/3000/4000/6500	92 lm/W	115x115x53mm	60	400x500x460mm	22.50 kg
LRS10.008-GU10	8W	672	2700/3000/4000/6500	84 lm/W	115x115x53mm	60	400x500x460mm	22.50 kg

\*3N Company has the right to make any changes it deems necessary without prior notice.  
\*Technical data has a tolerance of ± 10%.