



# RECESSED MOUNTED SPOT LIGHT

## AREAS OF APPLICATION

Housing • Offices • Shops • Markets • Cafes • Restaurants • Hospitals • Training Halls  
It can be used in areas requiring long life and high illumination.




# ASYA-185

RECESSED MOUNTED SPOT LIGHT




## PRODUCT SPECIFICATIONS


- Body** : Alu Body /RAL9005
- Optic Cover** : Alu Reflector
- Led Driver** : Osram-Tridonic-Philips
- Led Chip** : Samsung, Osram, COB
- Input Voltage** : 220-240V/AC 50-60Hz
- Operating Temperature** : -10°C~+40°C
- CRI** : CRI > 80, 90
- IP Class** : IP20
- Options** : Body Color Options : RAL9016  
Application Options:  
Track Rail Socket or Ceiling Rose  
Color Temperature :  
2700K/3000K/4000K/6500K  
DALI



### PHOTOMETRIC DISTRIBUTION

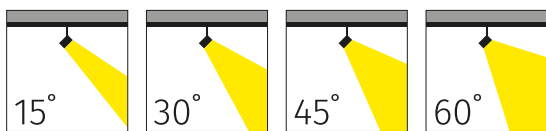

### TECHNICAL DRAWING

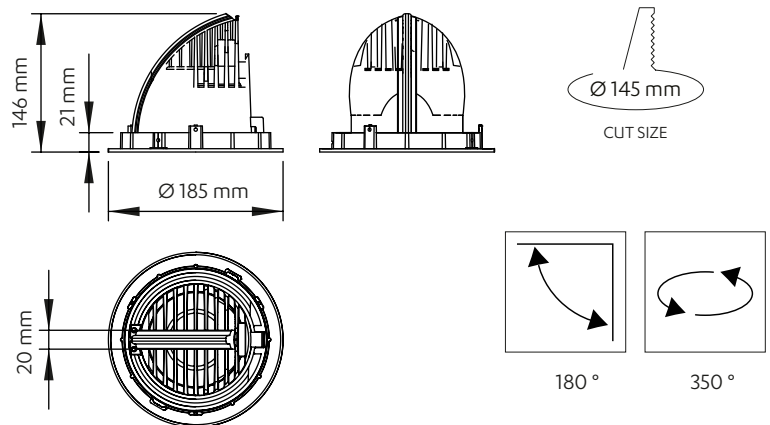

### PRODUCT SPECIFICATIONS

Item Code	Power (W)	Luminaire Lumen (lm)	Color Temperature (K)	Efficiency (lm/W)	Dimensions (LxWxH)	Qty/ Carton	Carton Size (LxWxH)	G.W/ Carton
LRS20.020	20W	1.800	2700/3000/4000/6500	90lm/W	185x185x146mm	18	290x500x580mm	16.29 kg
LRS20.030	30W	2.850	2700/3000/4000/6500	95lm/W	185x185x146mm	18	290x500x580mm	16.29 kg

\*3N Company has the right to make any changes it deems necessary without prior notice.  
\*Technical data has a tolerance of ±10%.