



Atlas Product Introduction
Video

ATLAS


AREAS OF APPLICATION

Hangars • Warehouses • Factories • Facilities • Sports Facilities • Forklift Ways
Designed to meet the demands of long-term use and high-lumen applications.



ATLAS

HIGH / LOW BAY LUMINAIRES

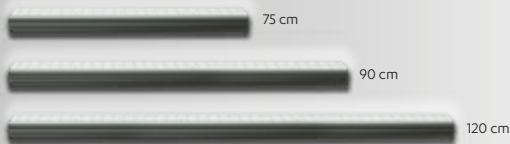


PRODUCT SPECIFICATIONS


- Body** : Alu Body / RAL7016
- Optic Cover** : Lens -60°-90°-(30°+90°) High Rack
- Led Driver** : Osram-Tridonic-Philips-3N
- Led Chip** : Samsung, Osram, Seoul
- Input Voltage** : 220-240V/AC 50-60Hz
- Temperature Range** : -20°C~+40°C
- CRI** : CRI > 80
- IP Class** : IP65
- Options** : Application Options : Surface/Busbar/Pendant
Color Temperature : 3000K/4000K/6500K
Emergency Kit - DALI




TECHNICAL DRAWING

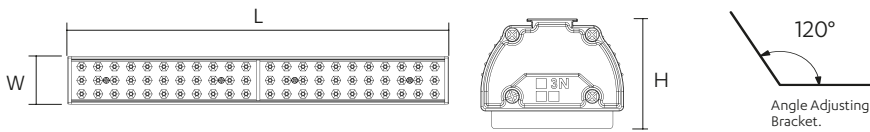

PHOTOMETRIC DISTRIBUTION

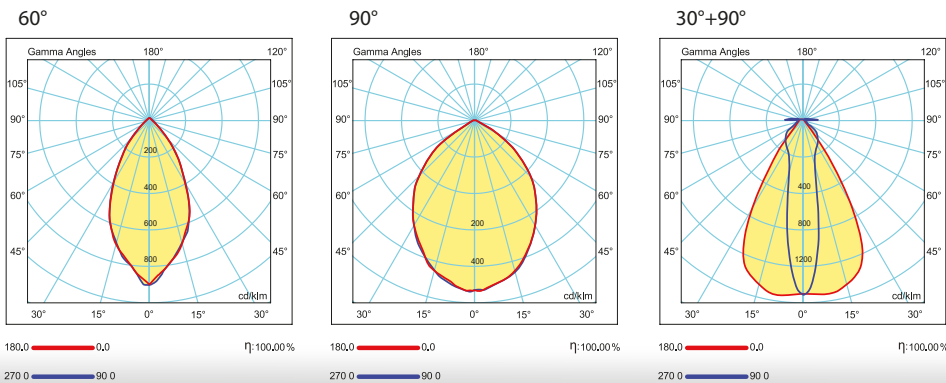

ACCESSORIES



PRODUCT SPECIFICATIONS

Item Code	Power (W)	Luminaire Lumen (lm)	Color Temperature (K)	Efficiency (lm/W)	Dimensions (LxWxH)	Qty/Carton	Carton Size (LxWxH)	G.W/Carton
LYT20.050	50W	8.000	3000/4000/6500	160lm/W	750x76x60mm	9	1310x310x320mm	18 kg
LYT20.075	75W	12.000	3000/4000/6500	160lm/W	900x76x60mm	9	1310x310x320mm	27 kg
LYT20.100	100W	16.000	3000/4000/6500	160lm/W	1200x76x60mm	9	1310x310x320mm	34.5 kg

*3N Company has the right to make any changes it deems necessary without prior notice.
*Technical data has a tolerance of ± 10%.