



Atlas Product Introduction Video

# ATLAS

## AREAS OF APPLICATION

Hangars • Warehouses • Factories • Facilities • Sports Facilities • Forklift Ways  
Designed to meet the demands of long-term use and high-lumen applications.



# ATLAS EXTENDED



OPTIONAL  
2-3-4 Modular Design





## PRODUCT SPECIFICATIONS


- Body** : Alu Body / RAL7016
- Optic Cover** : Lens -60°-90°-(30°+90°) High Rack
- Led Driver** : Osram-Tridonic-Philips-3N
- Led Chip** : Samsung, Osram, Seoul
- Input Voltage** : 220-240V/AC 50-60Hz
- Temperature Range** : -20°C~+40°C
- CRI** : CRI > 80
- IP Class** : IP65
- Options** : Application Options : Surface/Busbar/Pendant  
Color Temperature : 3000K/4000K/6500K  
Emergency Kit - DALI




### TECHNICAL DRAWING

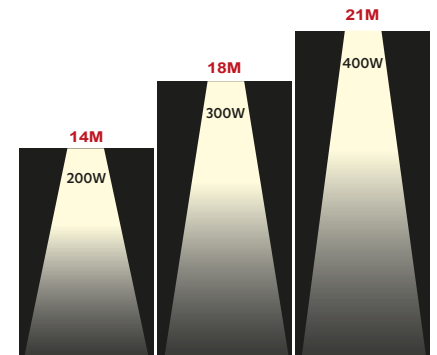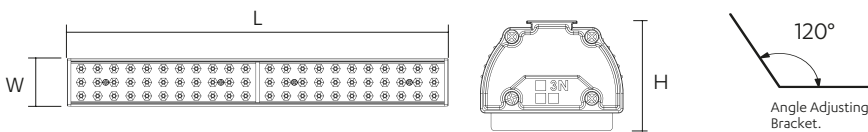

### PHOTOMETRIC DISTRIBUTION

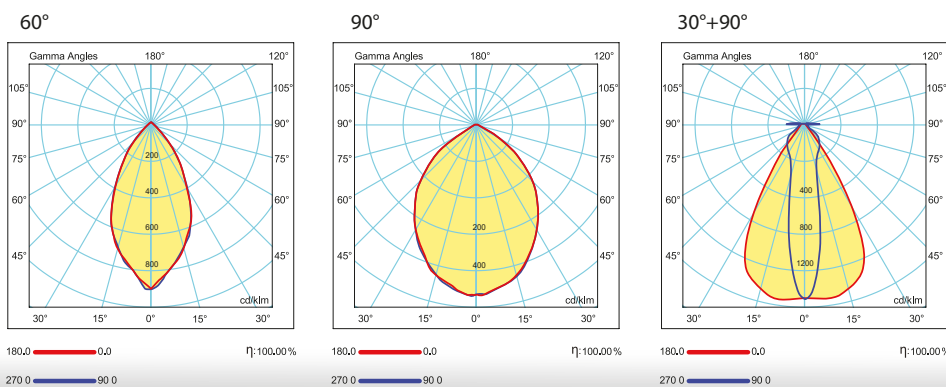

### ACCESSORIES



## PRODUCT SPECIFICATIONS

Item Code	Power (W)	Luminaire Lumen (lm)	Color Temperature (K)	Efficiency (lm/W)	Dimensions (LxWxH)	Qty/ Carton	Carton Size (LxWxH)	G.W/ Carton
LYT20.050	200W	32.000	3000/4000/6500	160lm/W	1200x152x120mm	1	900x400x400mm	4 kg
LYT20.075	300W	48.000	3000/4000/6500	160lm/W	1200x228x120mm	1	1200x500x400mm	8.4 kg
LYT20.100	400W	64.000	3000/4000/6500	160lm/W	1200x304x120mm	1	1500x600x400mm	10.8 kg

\*3N Company has the right to make any changes it deems necessary without prior notice.  
\*Technical data has a tolerance of ± 10%.