



Clove Product Introduction
Video


CLOVE

AREAS OF APPLICATION

Shop • Cafes • Restaurants • Parking Lots • Offices • Training Halls • Hospital • Factory • Facility
Designed to use in the areas requiring long-lasting and high lumen lighting.




CLOVE 60x60




PRODUCT SPECIFICATIONS

- Body** : Dkp Steel Sheet / RAL9003
- Optic Cover** : PMMA Opal Diffuser
- Driver** : Osram-Tridonic-Philips-3N
- Led Chip** : Samsung, Osram, Seoul
- Input Voltage** : 220-240V/AC 50-60Hz
- Temperature Range** : -10°C~+40°C
- CRI** : CRI > 80
- IP Class** : IP40
- Options** : Frame Options : PC ve Aluminum
Application Option:
Plaster Ceiling/Suspended Ceiling/
Clip In Mounted /Surface Mounted
Color Temperature : 3000K/4000K/6500K
Emergency Kit

PHOTOMETRIC DISTRIBUTION

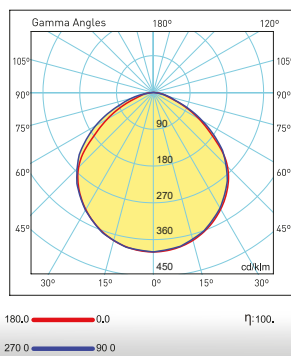


TECHNICAL DRAWING

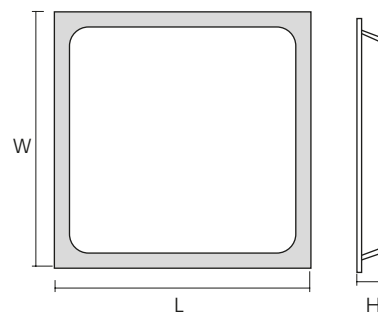

ACCESSORY FOR PLASTER CEILING



PLASTER CEILING HOLE SIZE

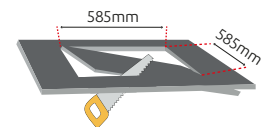

PRODUCT SPECIFICATIONS

Item Code	Power (W)	Luminaire Lumen (lm)	Color Temperature (K)	Efficiency (lm/W)	Dimensions (LxWxH)	Qty/Carton	Carton Size (LxWxH)	G.W/Carton
LOF10.036 / Plaster	36W	3.600	3000/4000/6500	100lm/W	595x595x35mm	10	620x640x450mm	19.2 kg
LOF10.036 / Stonewool	36W	3.600	3000/4000/6500	100lm/W	595x595x35mm	10	620x640x450mm	19.2 kg
LOF10.036 / Surface M.	36W	3.600	3000/4000/6500	100lm/W	600x600x35mm	10	620x640x450mm	19.2 kg
LOF10.036 / Clip In	36W	3.600	3000/4000/6500	100lm/W	600x600x35mm	10	620x640x450mm	19.2 kg

*3N Company has the right to make any changes it deems necessary without prior notice.
*Technical data has a tolerance of ± 10%.