



CROCUS

APPLICATION AREAS

Hangars • Warehouses • Factories • Production Facilities • Facilities
Designed to meet the demands of long-term use and high-lumen applications.





CROCUS-MIDI

HIGH / LOW BAY LUMINAIRES



PRODUCT SPECIFICATIONS

- Body** : Alu Body/RAL7016
- Optic Cover** : 60°/90° PMMA Lens
- Led Driver** : Osram-Tridonic-Philips
- Led Chip** : Samsung, Osram, Seoul
- Input Voltage** : 220-240V/AC 50-60Hz
- Temperature Range** : -10°C~+40°C
- CRI** : CRI > 80
- IP Class** : IP65
- IK Code** : IK07
- Options** : Application Options : Surface/Busbar/Pendant
Color Temperature : 3000K/4000K/6500K
DALI

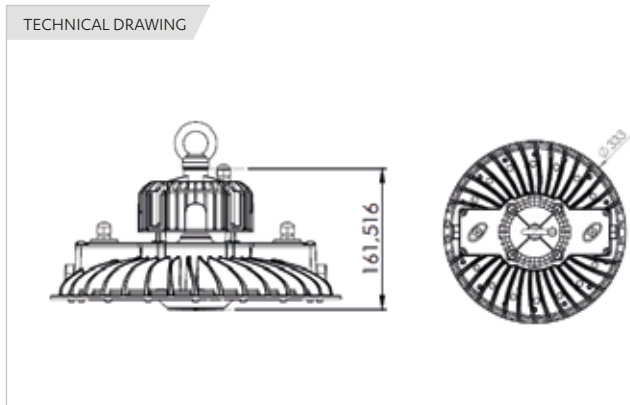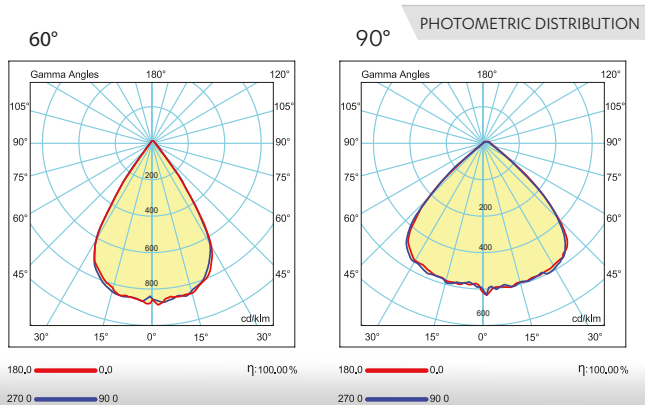

PRODUCT SPECIFICATIONS

Item Code	Power (W)	Luminaire Lumen (lm)	Color Temperature (K)	Efficiency (lm/W)	Dimensions (LxWxH)	Qty/Carton	Carton Size (LxWxH)	G.W/Carton
LYT40.140	140W	18.900	3000/4000/6500	135lm/W	330x330x87mm	1	350x350x110mm	4.6 kg
LYT40.200	200W	26.000	3000/4000/6500	130lm/W	330x330x87mm	1	350x350x110mm	4.6 kg

*3N Company has the right to make any changes it deems necessary without prior notice.
*Technical data has a tolerance of ± 10%.