



# CROCUS

## APPLICATION AREAS

Hangars • Warehouses • Factories • Production Facilities • Facilities  
Designed to meet the demands of long-term use and high-lumen applications.




# CROCUS-MINI

HIGH / LOW BAY LUMINAIRES




## PRODUCT SPECIFICATIONS

- Body** : Alu Body/RAL7016
- Optic Cover** : 60°/90° PMMA Lens
- Led Driver** : Osram-Tridonic-Philips
- Led Chip** : Samsung, Osram, Seoul
- Input Voltage** : 220-240V/AC 50-60Hz
- Temperature Range** : -10°C~+40°C
- CRI** : CRI > 80
- IP Class** : IP65
- IK Code** : IK07
- Options** : Application Options : Surface/Busbar/Pendant  
Color Temperature : 3000K/4000K/6500K  
DALI

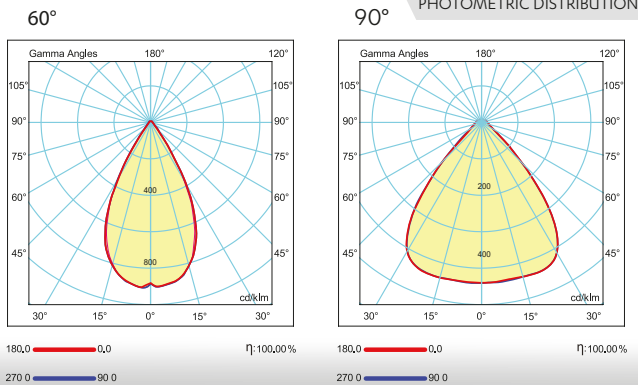

## TECHNICAL DRAWING

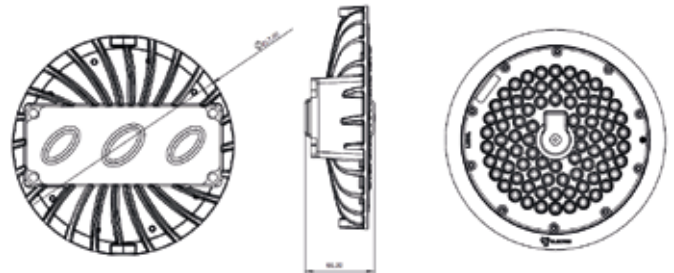

## PRODUCT SPECIFICATIONS

Item Code	Power (W)	Luminaire Lumen (lm)	Color Temperature (K)	Efficiency (lm/W)	Dimensions (LxWxH)	Qty/Carton	Carton Size (LxWxH)	G.W/Carton
LYT40.055	55W	8.250	3000/4000/6500	150lm/W	212x212x66mm	1	232x232x100mm	2 kg
LYT40.072	72W	10.080	3000/4000/6500	140lm/W	212x212x66mm	1	232x232x100mm	2 kg
LYT40.090	90W	11.700	3000/4000/6500	130lm/W	212x212x66mm	1	232x232x100mm	2 kg

\*3N Company has the right to make any changes it deems necessary without prior notice.  
\*Technical data has a tolerance of ± 10%.