



D-MOSS

AREAS OF APPLICATION

Shops • Cafes • Restaurants • Offices • Training Halls • Hospitals • Factories • Facility
Suitable for use in the areas requiring long-lasting and high lumen lighting.



D-MOSS

DOWNLIGHT LED LUMINAIRE




PRODUCT SPECIFICATIONS


- Body** : Aluminum Body and Circle / RAL9003
- Optic Cover** : PMMA and PS Opal Diffuser
- Driver** : Osram-Tridonic-Philips-3N
- Led Chip** : Samsung, Osram, Seoul
- Input Voltage** : 220-240V/AC 50-60Hz
- Temperature Range** 10°C~+40°C
- CRI** : CRI > 80
- IP Class** : IP40
- Options** : Application Options : Recessed/Surface Mounted
Color Temperature: 3000K/4000K/6500K
Emergency Kit - DALI




PHOTOMETRIC DISTRIBUTION

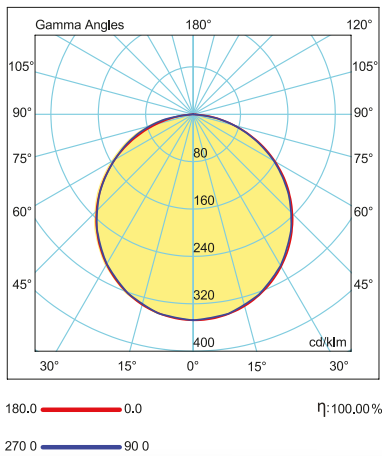

TECHNICAL DRAWING



PLASTER CEILING HOLE SIZE



PRODUCT SPECIFICATIONS

Item Code	Power (W)	Luminaire Lumen (lm)	Color Temperature (K)	Efficiency (lm/W)	Dimensions (LxWxH)	Cut Size (Ø)	Qty/Carton	Carton Size (LxWxH)	G.W/Carton
LDL20.009	21W	2.100	3000/4000/6500	100lm/W	235x100mm	215mm	6	250x485x350mm	6 kg
LDL20.012	24W	2.400	3000/4000/6500	100lm/W	235x100mm	215mm	6	250x485x350mm	6 kg

*3N Company has the right to make any changes it deems necessary without prior notice.
 *Technical data has a tolerance of ± 10%.