



Globy Product Introduction
Video

GLOBY

AREAS OF APPLICATION

Building Entrances • Stairwells • Corridor • Balcony
Suitable for use in the areas requiring long-lasting and sensor lighting.



GLOBY LED


CEILING LUMINAIRE




PRODUCT SPECIFICATIONS

Body	: Metal Body
Optic Cover	: Opal PC Cover
Driver	: 3N
Led Chip	: Samsung, Osram, Seoul
Input Voltage	: 220-240V/AC 50-60Hz
Temperature Range	: -10°C~+40°C
CRI	: CRI > 80
IP Class	: IP40
Options	: Color Temperature : 3000K/4000K/6500K Flat/Oval Body

PHOTOMETRIC DISTRIBUTION

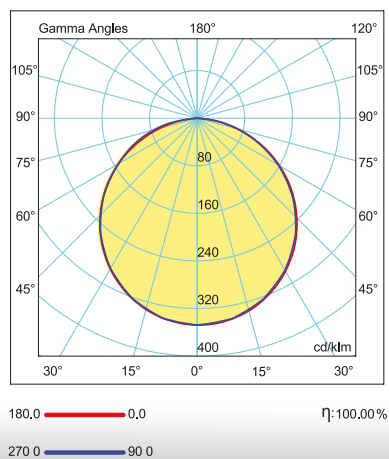

TECHNICAL DRAWING

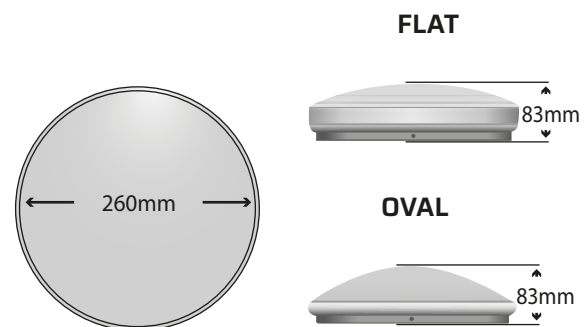

PRODUCT SPECIFICATIONS

Item Code	Power (W)	Luminaire Lumen (lm)	Color Temperature (K)	Efficiency (lm/W)	Dimensions (LxWxH)	Qty/Carton	Carton Size (LxWxH)	G.W/Carton
LGL10.018 OVAL	18W	1.800	3000/4000/6500	100lm/W	260x83mm	1	280x88x280mm	533 gr
LGL10.018 FLAT	18W	1.800	3000/4000/6500	100lm/W	260x83mm	1	280x88x280mm	533 gr

*3N Company has the right to make any changes it deems necessary without prior notice.
*Technical data has a tolerance of $\pm 10\%$.