



Globy Product Introduction  
Video

# GLOBY

## AREAS OF APPLICATION

Building Entrances • Stairwells • Corridor • Balcony  
Suitable for use in the areas requiring long-lasting and sensor lighting.



# GLOBY SENSOR/KIT

CEILING LUMINAIRE



## PRODUCT SPECIFICATIONS


<b>Body</b>	: Metal Body
<b>Optic Cover</b>	: Opal PC Cover
<b>Driver</b>	: 3N
<b>Led Chip</b>	: Samsung, Osram, Seoul
<b>Input Voltage</b>	: 220-240V/AC 50-60Hz
<b>Temperature Range</b>	: -10°C~+40°C
<b>CRI</b>	: CRI > 80
<b>IP Class</b>	: IP40
<b>Motion Sensor</b>	: Lighting and Range Adjustable
<b>Emergency Run Time</b>	: 1 Hour
<b>Battery&amp;Charging Time</b>	: 9 V - 250 mAh Ni-Cd / 24 Hour
<b>Options</b>	: Color Temperature : 3000K/4000K/6500K Flat/Oval Body




WITH RADAR  
SENSOR



DAYLIGHT  
SENSOR

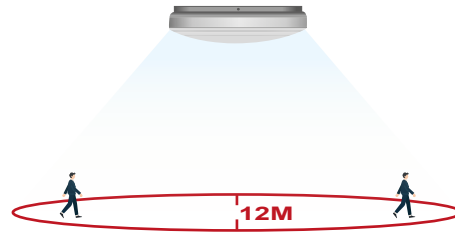


PHOTOMETRIC DISTRIBUTION

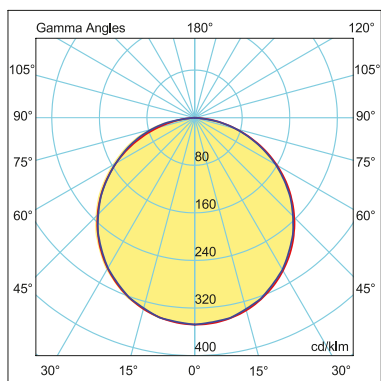

180.0 — 0.0       $\eta$ : 100.00%  
270.0 — 90.0

TECHNICAL DRAWING



**FLAT**



**OVAL**



## PRODUCT SPECIFICATIONS

Item Code	Power (W)	Luminaire Lumen (lm)	Color Temperature (K)	Efficiency (lm/W)	Dimensions (LxWxH)	Qty/Carton	Carton Size (LxWxH)	G.W/Carton
LGL10.018 OVAL	18W	1.800	3000/4000/6500	100lm/W	260x83mm	1	280x88x280mm	533 gr
LGL10.018 FLAT	18W	1.800	3000/4000/6500	100lm/W	260x83mm	1	280x88x280mm	533 gr

\*3N Company has the right to make any changes it deems necessary without prior notice.  
\*Technical data has a tolerance of  $\pm 10\%$ .