

DECORATIVE

APPLICATION AREAS

Shops • Cafes • Restaurants • Offices • Training Halls • Hospitals
It is ideal for use in areas that demand lights with high lumen and long lifespan.




KARRE

DECORATIVE LUMINAIRE




PRODUCT SPECIFICATIONS


- Body** : Electrostatic Powder Coated
DKP Sheet Body/RAL9005
- Optic Cover** : Diffuser (PMMA/PC)
- Led Driver** : Tridonic, Osram
- Led Chip** : Samsung, Osram, Seoul
- Input Voltage** : 220-240V/AC 50-60Hz
- Temperature Range** : -10°C~+40°C
- CRI** : CRI > 80
- IP Class** : IP40
- Options** : Body Color Options: RAL9016/RAL7001
Application Options: Surface/Surface
Color Temperature: RGBW/2700K/3000K/4000K/
Tuneable White
DALI/NON-DIMMABLE/BLUETOOTH

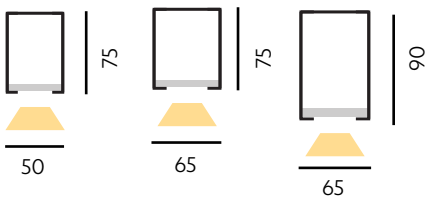

TECHNICAL DRAWING



APPLICATION AREAS

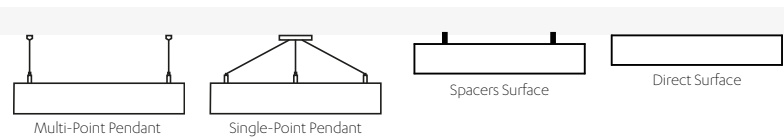

PRODUCT SPECIFICATIONS

Item Code	Power (W)	Luminaire Lumen (lm)	Color Temperature (K)	Efficiency (lm/W)	Dimensions (LxWxH)	Qty/Carton	Carton Size (LxWxH)	G.W/Carton
LLN90.032	55W	5.225	RGBW/2700/3000/4000	95lm/W	600x600x75mm	1	610x100x610mm	4.5 kg
LLN90.043	83W	7.885	RGBW/2700/3000/4000	95lm/W	600x1200x75mm	1	1210x105x1210mm	6 kg
LLN90.054	55W	5.775	RGBW/2700/3000/4000	105lm/W	600x600x75mm	1	610x100x610mm	5.5 kg
LLN90.072	83W	8.715	RGBW/2700/3000/4000	105lm/W	600x1200x75mm	1	1210x105x1210mm	7 kg
LLN90.087	55W	5.225	RGBW/2700/3000/4000	95lm/W	600x600x90mm	1	610x100x610mm	5.5 kg
LLN90.108	83W	7.885	RGBW/2700/3000/4000	95lm/W	600x1200x90mm	1	1210x105x1210mm	7 kg

*3N Company has the right to make any changes it deems necessary without prior notice.
*Technical data has a tolerance of ± 10%.