



# LED BULBS

## AREAS OF APPLICATION

Residences • Cafes • Restaurants • Markets • Stores




# LED FILAMENT BULB




## PRODUCT SPECIFICATIONS

<b>Power</b>	: 4W/6W/8W
<b>Energy Class</b>	: E
<b>Base Type</b>	: E14/E27
<b>Input Voltage</b>	: 160-260V - 50/60Hz
<b>Beam angle</b>	: 200
<b>Luminous Flux</b>	: 110lm/W
<b>Color Temperature (CCT)</b>	: 3000K/4000K/6500K
<b>Lifespan</b>	: 20.000 Hour
<b>Working Temperature</b>	: -20°C~+40°C

### PHOTOMETRIC DISTRIBUTION

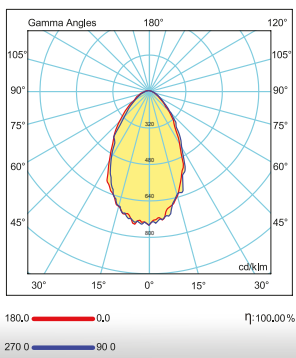

### TECHNICAL DRAWING

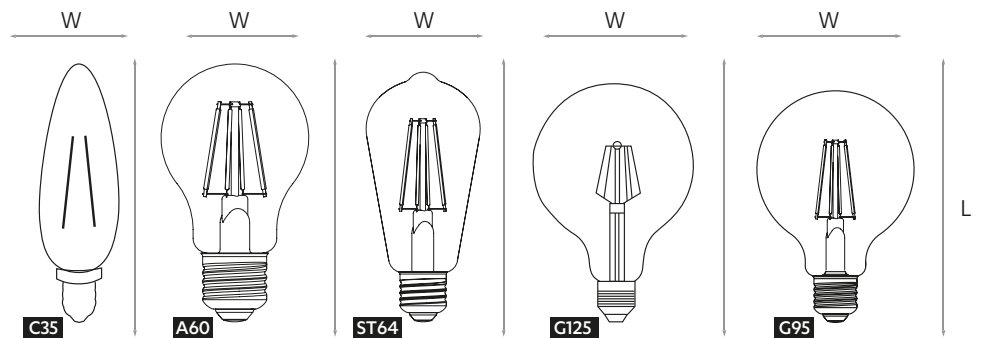

### PRODUCT SPECIFICATIONS

Item Code	Power (W)	Luminaire Lumen (lm)	Color Temperature (K)	Efficiency (lm/W)	Dimensions (LxWxH)	Qty/Carton	Carton Size (LxWxH)	G.W/Carton
C35	4W	440	2700	110lm/W	35x100mm	100	360x185x210mm	-
A60	6W	800	2700	110lm/W	60x106mm	100	680x345x265mm	-
ST64	4W	440	2700	110lm/W	64x145mm	100	715x365x325mm	-
ST64	6W	660	2700	110lm/W	64x145mm	100	715x365x325mm	-
G125	8W	880	2700	110lm/W	125x170mm	50	670x670x400mm	-
G95	4W	440	2700	110lm/W	90x140mm	50	520x520x340mm	-
G95	6W	660	2700	110lm/W	90x140mm	50	520x520x340mm	-

\*3N Company has the right to make any changes it deems necessary without prior notice.  
 \*Technical data has a tolerance of  $\pm 10\%$ .