



# LINDA


## APPLICATION AREAS

Discount Stores • Butchers • Offices • Cafes • Restaurants • Shops • Workshops  
It can be used in areas requiring long life and high illumination.



# LINDA T8

LINEAR TRUNKING FIXTURE

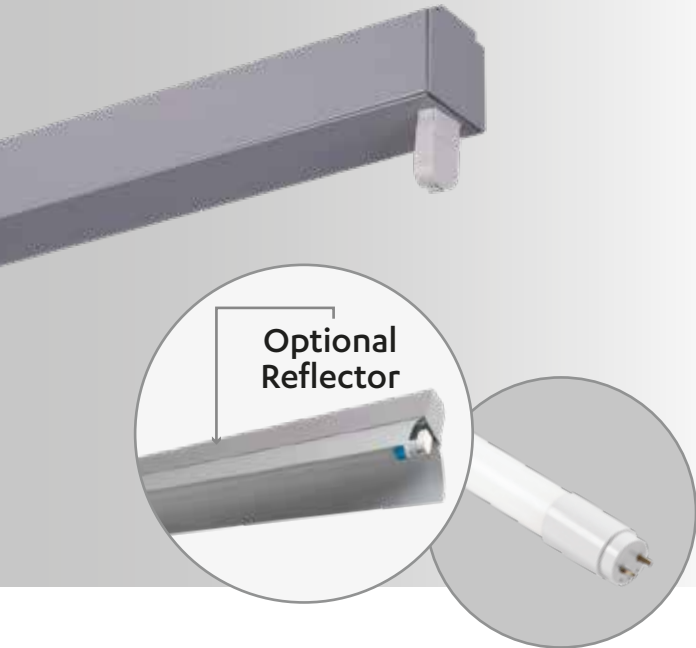

## PRODUCT SPECIFICATIONS

**Body** : Alu Body / PC Cover / RAL7001



**Base** : T8 Duy

**Input Voltage** : 220-240V/AC 50-60Hz


**Operating Temperature** : -10°C~+40°C

**IP Class** : IP40

**Options** : Linkable Structure,  
Plug and Play Socket System  
Hopping Transmission Line  
Emergency Kit



### TECHNICAL DRAWING

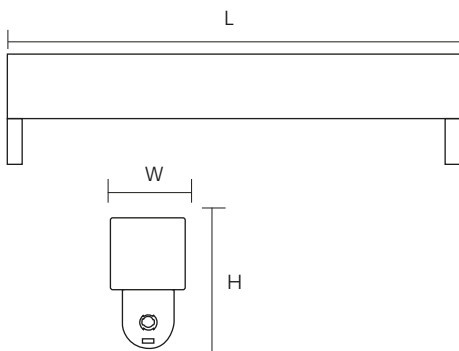

### ACCESSORIES



### OPTIMAL ACCESSORIES



### PRODUCT SPECIFICATIONS

Item Code	Size (cm)	Energy Supply	Dimension (LxWxH)	Qty/Carton	Carton Size (LxWxH)	G.W/Carton
LMR30.150	150	Continuous Energy	40x1523x35mm	14	260x1555x170mm	7.4 kg
LMR30.300	300	Hopping Energy	40x3004.5x35mm	16	260x3100x180mm	17 kg

\*3N Company has the right to make any changes it deems necessary without prior notice.  
\*Technical data has a tolerance of ± 10%.