



Lotus Product Introduction
Video

LOTUS


APPLICATION AREAS

Shops • Cafes • Restaurants • Offices • Training Halls • Hospitals • Facilities • Sports Facilities
It is ideal for use in areas that demand lights with high lumen and long lifespan.




LOTUS

LINEAR LUMINAIRE (DISCOUNT STORE)

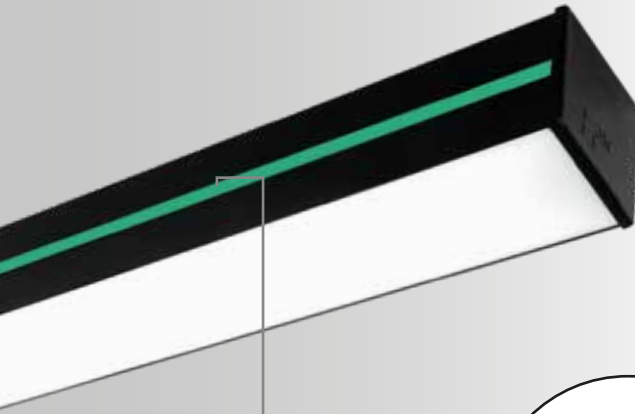


Including edge strips color options to complement your corporate branding





PRODUCT SPECIFICATIONS

- Body** : Alu Body / RAL9005
- Optic Cover** : PC Opal Diffuser
- Led Driver** : Osram-Tridonic-Philips-3N
- Led Chip** : Samsung, Osram, Seoul
- Input Voltage** : 220-240V/AC 50-60Hz
- Temperature Range** : -10°C~+40°C
- CRI** : CRI > 80
- IP Class** : IP40
- Options** : Body Color Options : RAL9016/RAL7001
Application Options : Surface/Pendant
Color Temperature : 3000K/4000K/6500K
Emergency Kit - DALI



It manufactures in 15 cm modular and extendable up to 3 mt.

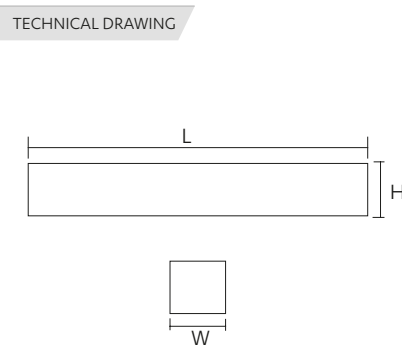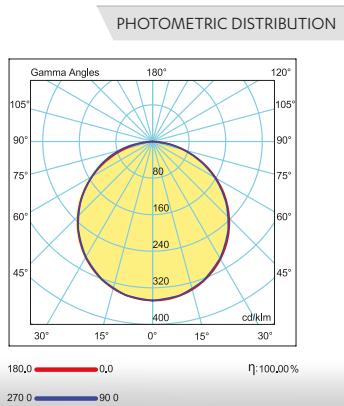

ACCESSORIES		OPTIMAL ACCESSORIES
Joining Connector SP060.10.00001	Surface Mounting Kit R070.10.00091	U-Shape Mounting Kit SP060.10.00003
End Cap R010.40.00016	Energy Input R050.10.00002	1,2M. Suspension Wire C030.98.12001

PRODUCT SPECIFICATIONS

Item Code	Power (W)	Luminaire Lumen (lm)	Color Temperature (K)	Efficiency (lm/W)	Dimensions (LxWxH)	Qty/Carton	Carton Size (LxWxH)	G.W/Carton
LLN10.036	36W	3.600	3000/4000/6500	100lm/W	1000x87x87mm	6	1545x170x250mm	8.30 kg

*3N Company has the right to make any changes it deems necessary without prior notice.
*Technical data has a tolerance of ± 10%.