



Marlin Product Introduction  
Video

# MARLIN



## APPLICATION AREAS

Shops • Cafes • Restaurants • Offices • Training Halls • Hospitals • Facilities • Sports Facilities  
It is ideal for use in areas that demand lights with high lumen and long lifespan.




# MARLIN

LINEAR LUMINAIRE (DISCOUNT STORE)




## PRODUCT SPECIFICATIONS


- Body** : Alu Body / RAL7043
- Optic Cover** : PC Opal Diffuser
- Led Driver** : 3N
- Led Chip** : Samsung, Osram, Seoul
- Input Voltage** : 220-240V/AC 50-60Hz
- Temperature Range** : -10°C~+40°C
- CRI** : CRI > 80
- IP Class** : IP40
- Options** : Application Options : Surface/Pendant  
Color Temperature : 3000K/4000K/6500K



### TECHNICAL DRAWING



### PHOTOMETRIC DISTRIBUTION

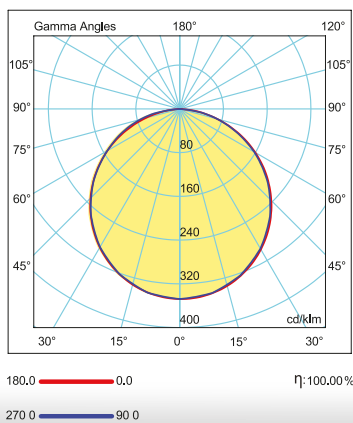

### ACCESSORIES

<b>Joining Connector</b>  R070.10.00093	<b>Diffuser Connection Cover</b>  SP060.10.00008	<b>Mounting Kit</b>  SP060.10.00004	<b>U-Shape Mounting Kit</b>  SP060.10.00006
<b>End Cap</b>  R010.40.00004	<b>Energy Input</b>  R050.10.00002	<b>OPTINAL ACCESSORIES</b>	
		<b>1,2M. Suspension Wire</b>  C030.98.12001	

### PRODUCT SPECIFICATIONS

Item Code	Power (W)	Luminaire Lumen (lm)	Color Temperature (K)	Efficiency (lm/W)	Dimensions (LxWxH)	Qty/Carton	Carton Size (LxWxH)	G.W/Carton
LLN80.022	22W	2.750	3000/4000/6500	125lm/W	1420x40x50mm	12	1430x170x180mm	11.40 kg
LLN80.044	44W	5.500	3000/4000/6500	125lm/W	2840x40x50mm	12	2890x170x180mm	25 kg
LLN80.040	40W	4.000	3000/4000/6500	100lm/W	1420x40x50mm	12	1430x170x180mm	11.40 kg
LLN80.080	80W	8.000	3000/4000/6500	100lm/W	2840x40x50mm	12	2890x170x180mm	25 kg

\*3N Company has the right to make any changes it deems necessary without prior notice.  
\*Technical data has a tolerance of ± 10%.