



SURFACE MOUNTED SPOT LIGHT

AREAS OF APPLICATION

Housing • Offices • Shops • Markets • Cafes • Restaurant • Hospitals • Training Halls
It can be used in areas requiring long life and high illumination.



MIRA-100

SURFACE MOUNTED SPOT LIGHT




PRODUCT SPECIFICATIONS


Body	: Alu Body/RAL9005
Optic Cover	: Alu Reflector
Led Driver	: Osram-Tridonic-Philips
Led Chip	: Samsung, Osram, GU10 Bulb
Input Voltage	: 220-240V/AC 50-60Hz
Operating Temperature	: -10°C~+40°C
CRI	: CRI > 80, 90
IP Class	: IP20
Options	: Body Color Options: RAL9016 Application Options : Surface Mounted Color Temperature : 2700K/3000K/4000K/6500K DALI



PHOTOMETRIC DISTRIBUTION



TECHNICAL DRAWING

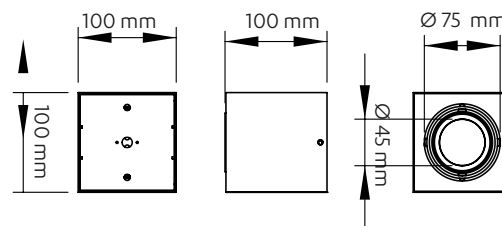

PRODUCT SPECIFICATIONS

Item Code	Power (W)	Luminaire Lumen (lm)	Color Temperature (K)	Efficiency (lm/W)	Dimensions (LxWxH)	Qty/Carton	Carton Size (LxWxH)	G.W/Carton
LRS30.008	8W	704	2700/3000/4000/6500	88lm/W	100x100x100mm	-	-	-
LRS30.010	10W	880	2700/3000/4000/6500	88lm/W	100x100x100mm	-	-	-
LRS30.005-GU10	5W	460	2700/3000/4000/6500	92lm/W	100x100x100mm	-	-	-
LRS30.008-GU10	8W	680	2700/3000/4000/6500	84lm/W	100x100x100mm	-	-	-

*3N Company has the right to make any changes it deems necessary without prior notice.
*Technical data has a tolerance of ± 10%.