



SURFACE MOUNTED SPOT LIGHT

AREAS OF APPLICATION

Housing • Offices • Shops • Markets • Cafes • Restaurant • Hospitals • Training Halls
It can be used in areas requiring long life and high illumination.




MIRA-160

SURFACE MOUNTED SPOT LIGHT




PRODUCT SPECIFICATIONS


- Body** : Alu Body/RAL9005
- Optic Cover** : Alu Reflector
- Led Driver** : Osram-Tridonic-Philips
- Led Chip** : Samsung, Osram
- Input Voltage** : 220-240V/AC 50-60Hz
- Operating Temperature** : -10°C~+40°C
- CRI** : CRI > 80, 90
- IP Class** : IP20
- Options** : Body Color Options : RAL9016
Application Options : Surface Mounted
Color Temperature : 2700K/3000K/4000K/6500K
DALI



PHOTOMETRIC DISTRIBUTION

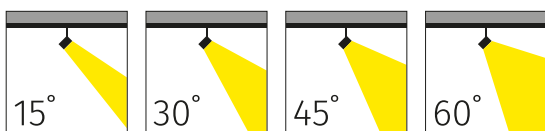

TECHNICAL DRAWING

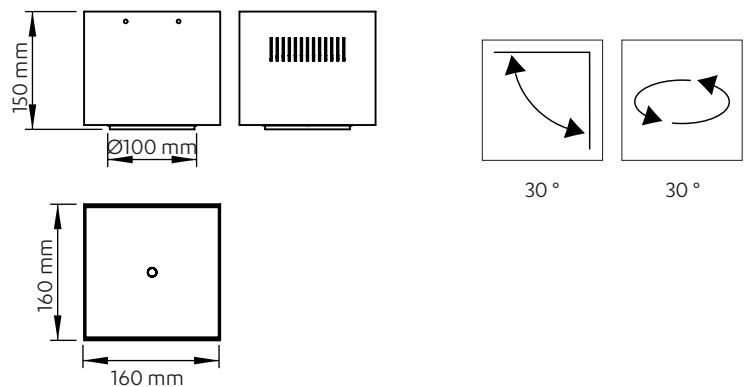

PRODUCT SPECIFICATIONS

Item Code	Power (W)	Luminaire Lumen (lm)	Color Temperature (K)	Efficiency (lm/W)	Dimensions (LxWxH)	Qty/Carton	Carton Size (LxWxH)	G.W/Carton
LRS30.030	30W	3.000	2700/3000/4000/6500	100lm/W	160x160x150mm	-	-	-
LRS30.035	40W	3.600	2700/3000/4000/6500	90lm/W	160x160x150mm	-	-	-

*3N Company has the right to make any changes it deems necessary without prior notice.
*Technical data has a tolerance of ± 10%.