



Modhex Product Introduction
Video

MODHEX

APPLICATION AREAS

Hangars • Warehouses • Factories • Production Facilities • Facilities
Designed to meet the demands of long-term use and high-lumen applications.



MODHEX

HIGH / LOW BAY LUMINAIRES





PRODUCT SPECIFICATIONS


Body	: Alu Body/Frame/RAL7016
Optic Cover	: 40°/60°/90° PMMA Lens/Tempered Glass
Led Driver	: Osram-Tridonic-Philips-3N
Led Chip	: Samsung, Osram, Seoul
Input Voltage	: 220-240V/AC 50-60Hz
Temperature Range	: -20°C~+40°C
CRI	: CRI > 80
IP Class	: IP66
IK Code	: IK09
Options	: Renk Sıcaklığı : 3000K/4000K/6500K DALI



TECHNICAL DRAWING

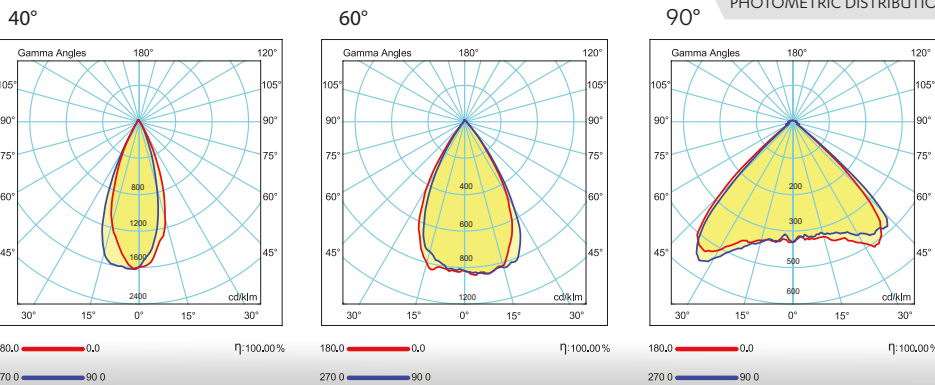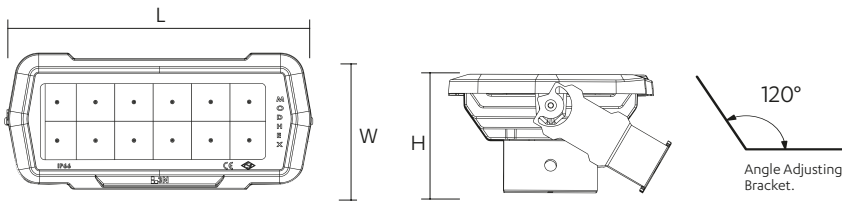

ACCESSORIES



PRODUCT SPECIFICATIONS

Item Code	Power (W)	Luminaire Lumen (lm)	Color Temperature (K)	Efficiency (lm/W)	Dimensions (LxWxH)	Qty/Carton	Carton Size (LxWxH)	G.W/Carton
LPR20.100	100W	12.500	3000/4000/6500	125lm/W	397x178x105 mm	1	425x215x120mm	3.96 kg
LPR20.120	120W	14.400	3000/4000/6500	120lm/W	397x178x105 mm	1	425x215x120mm	3.96 kg
LPR20.150	150W	18.000	3000/4000/6500	120lm/W	397x178x105 mm	1	425x215x120mm	3.96 kg

*3N Company has the right to make any changes it deems necessary without prior notice.
*Technical data has a tolerance of ± 10%.