



Modhex Product Introduction
Video

MODHEX

AREAS OF APPLICATION

Hangars • Warehouses • Factories • Facilities • Sports Facilities • Sports Pitches
Designed to meet the demands of long-term use and high-lumen applications.



MODHEX EXTENDED





PRODUCT SPECIFICATIONS

- Body** : Alu Body/Frame/RAL7016
- Optic Cover** : 18°/30°/40° PMMA Lens/Tempered Glass
- Led Driver** : Osram-Tridonic-Philips-3N
- Led Chip** : Samsung, Osram, Seoul
- Input Voltage** : 220-240V/AC 50-60Hz
- Temperature Range** : -20°C~+40°C
- CRI** : CRI > 80
- IP Class** : IP66
- IK Code** : IK09
- Options** : Body Color Options: RAL9005
Color Temperature : 3000K/4000K/6500K
DALI



TECHNICAL DRAWING

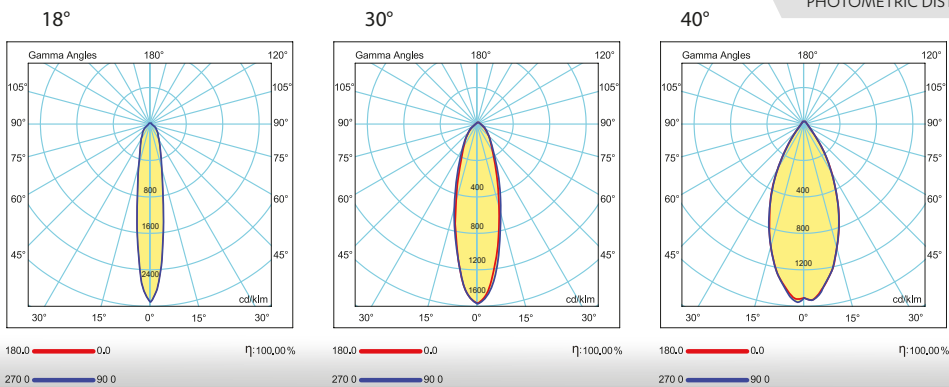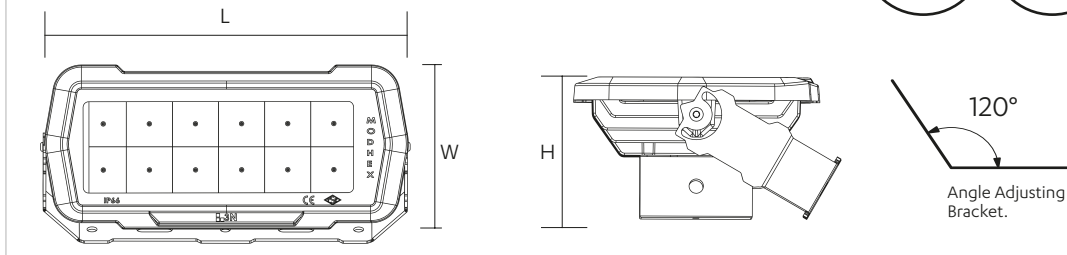

PHOTOMETRIC DISTRIBUTION

ACCESSORIES



PRODUCT SPECIFICATIONS

Item Code	Power (W)	Luminaire Lumen (lm)	Color Temperature (K)	Efficiency (lm/W)	Dimensions (LxWxH)	Qty/ Carton	Carton Size (LxWxH)	G.W/ Carton
LPR20.300	300W	36.000	3000/4000/6500	120lm/W	397x356x105mm	1	425x393x120mm	7.92 kg
LPR20.450	450W	54.000	3000/4000/6500	120lm/W	397x534x105mm	1	425x571x120mm	11.88 kg
LPR20.600	600W	72.000	3000/4000/6500	120lm/W	397x712x105mm	1	425x749x120mm	15.84 kg

*3N Company has the right to make any changes it deems necessary without prior notice.
*Technical data has a tolerance of ± 10%.