



Modhex Product Introduction
Video

MODHEX-T

AREAS OF APPLICATION

Designed for tunnel lighting




MODHEX-T

TUNNEL LIGHTING LUMINAIRE




PRODUCT SPECIFICATIONS

- Body** : Alu Body/Frame/RAL7016
- Optic Cover** : Tempered Glass
- Led Driver** : Osram-Tridonic-Philips-3N
- Led Chip** : Samsung, Osram, Seoul
- Input Voltage** : 220-240V/AC 50-60Hz
- Temperature Range** : -20°C~+40°C
- CRI** : CRI > 80
- IP Class** : IP66
- IK Code** : IK09
- Options** : Color Temperature : 3000K/4000K/6500K
DALI



[T-ASYM]
Tunnel,
Asymmetric






[T-CB]
Tunnel,
Opposite Angle




[T-SYM]
Tunnel,
Symmetric

TECHNICAL DRAWING

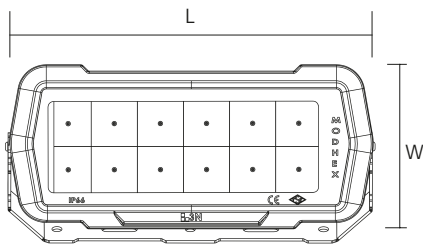


Angle Adjusting
Bracket.

PHOTOMETRIC DISTRIBUTION



180,0 — 0,0
270,0 — 90,0
η: 100,00%



180,0 — 0,0
270,0 — 90,0
η: 100,00%

ACCESSORIES



PRODUCT SPECIFICATIONS

Item Code	Power (W)	Luminaire Lumen (lm)	Color Temperature (K)	Efficiency (lm/W)	Dimensions (LxWxH)	Qty/Carton	Carton Size (LxWxH)	G.W/Carton
LPR20.120	120W	14.400	3000/4000/6500	120lm/W	397x178x105 mm	1	425x215x120mm	3.96 kg
LPR20.150	150W	18.000	3000/4000/6500	120lm/W	397x178x105 mm	1	425x215x120mm	3.96 kg

*3N Company has the right to make any changes it deems necessary without prior notice.
*Technical data has a tolerance of ±10%.