

MODI

AREAS OF APPLICATION

Building Entrances • Stairwells • Corridor • Balcony
Suitable for use in the areas requiring long-lasting and sensor lighting.




MODI LED

CEILING LUMINAIRE




PRODUCT SPECIFICATIONS


- Body** : ABS Body
- Optic Cover** : Opal PC Cover
- Driver** : Osram-Tridonic-Philips-3N
- Led Chip** : Samsung, Osram, Seoul
- Input Voltage** : 220-240V/AC 50-60Hz
- Temperature Range** : -10°C~+40°C
- CRI** : CRI > 80
- IP Class** : IP65
- Options** : Color Temperature : 3000K/4000K/6500K
White/Black Body

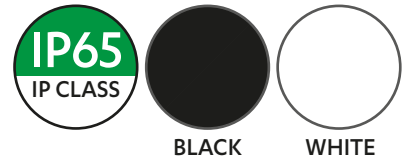

PHOTOMETRIC DISTRIBUTION

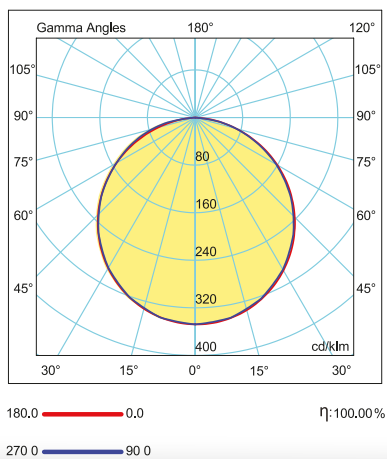

TECHNICAL DRAWING



PRODUCT SPECIFICATIONS

Item Code	Power (W)	Luminaire Lumen (lm)	Color Temperature (K)	Efficiency (lm/W)	Dimensions (LxWxH)	Qty/Carton	Carton Size (LxWxH)	G.W/Carton
LGL30.018	18W	1.500	3000/4000/6500	90lm/W	280x90mm	-	-	-

*3N Company has the right to make any changes it deems necessary without prior notice.
*Technical data has a tolerance of ±10%.