

MODI

AREAS OF APPLICATION

Building Entrances • Stairwells • Corridor • Balcony
Suitable for use in the areas requiring long-lasting and sensor lighting.



MODI WITH SENSOR

CEILING LUMINAIRE




PRODUCT SPECIFICATIONS


- Body : ABS Body
- Optic Cover : Opal PC
- Driver : 3N
- Led Chip : Samsung, Osram, Seoul
- Input Voltage : 220-240V/AC 50-60Hz
- Temperature Range : -10°C~+40°C
- CRI : CRI > 80
- IP Class : IP65
- Options : Lighting and Range Adjustable
: Color Temperature : 3000K/4000K/6500K
White/Black Body



PHOTOMETRIC DISTRIBUTION

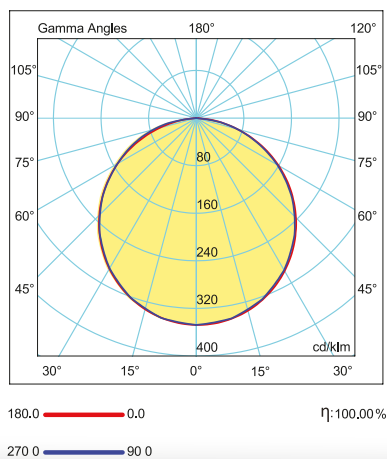

TECHNICAL DRAWING



PRODUCT SPECIFICATIONS

Item Code	Power (W)	Luminaire Lumen (lm)	Color Temperature (K)	Efficiency (lm/W)	Dimensions (LxWxH)	Qty/Carton	Carton Size (LxWxH)	G.W/Carton
LGL30.018	18W	1.500	3000/4000/6500	90lm/W	280x90mm	-	-	-

*3N Company has the right to make any changes it deems necessary without prior notice.
*Technical data has a tolerance of ± 10%.