



MODYLUS

AREAS OF APPLICATION

Hangars • Warehouses • Factories • Facilities • Sports Facilities • Sports Pitches
Designed to meet the demands of long-term use and high-lumen applications.



MODYLUS

FLOODLIGHT




PRODUCT SPECIFICATIONS


Body	: Alu Body/RAL7016
Optic Cover	: 40°/60°/90° PMMA Lens/Tempered Glass
Led Driver	: Osram-Tridonic-Philips
Led Chip	: Samsung, Osram
Input Voltage	: 220-240V/AC 50-60Hz
Temperature Range	: -10°C~+40°C
CRI	: CRI > 80
IP Class	: IP66
IK Code	: IK09
Options	: Color Temperature : 3000K/4000K/6500K DALI



TECHNICAL DRAWING

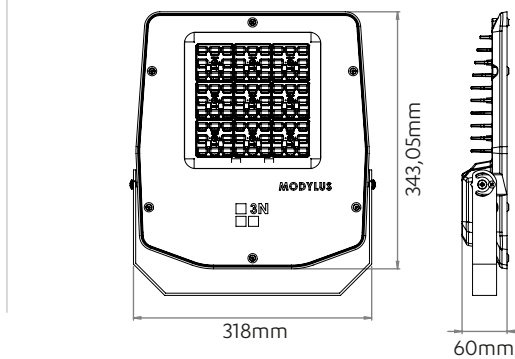


40°




180.0 — 0.0
270.0 — 90.0
η: 100.00%

60°



180.0 — 0.0
270.0 — 90.0
η: 100.00%

90°



180.0 — 0.0
270.0 — 90.0
η: 100.00%

PHOTOMETRIC DISTRIBUTION

PRODUCT SPECIFICATIONS

Item Code	Power (W)	Luminaire Lumen (lm)	Color Temperature (K)	Efficiency (lm/W)	Dimensions (LxWxH)	Qty/Carton	Carton Size (LxWxH)	G.W/Carton
LPR40.100	100W	12.500	3000/4000/6500	125lm/W	343x318x60mm	1	360x330x75mm	4 kg
LPR40.120	120W	14.400	3000/4000/6500	120lm/W	343x318x60mm	1	360x330x75mm	4 kg
LPR40.150	150W	18.000	3000/4000/6500	120lm/W	343x318x60mm	1	360x330x75mm	4 kg

*3N Company has the right to make any changes it deems necessary without prior notice.
*Technical data has a tolerance of ± 10%.