



# PINE

## AREAS OF APPLICATION

Building Entrances • Stairwells • Corridor • Balcony  
Suitable for use in the areas requiring long-lasting and sensor lighting.



# PINE

## 2xE27 SENSOR/KIT


CEILING LUMINAIRE




### PRODUCT SPECIFICATIONS

Body	: Metal Body
Optic Cover	: Textured Glass
Base Type	: E27
Input Voltage	: 220-240V/AC 50-60Hz
Temperature Range	: -10°C~+40°C
CRI	: CRI > 80
IP Class	: IP40
Emergency Run Time	: 1 Hour
Options	: Lighting and Range Adjustable Motion Sensor Optic Cover Options: Frosted, Screen Printing Glass

PHOTOMETRIC DISTRIBUTION

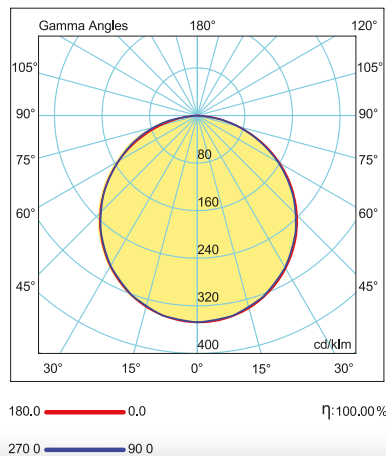

TECHNICAL DRAWING

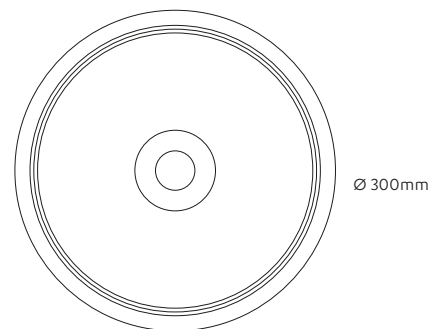

### PRODUCT SPECIFICATIONS

Item Code	Power (W)	Luminaire Lumen (lm)	Color Temperature (K)	Efficiency (lm/W)	Dimensions (LxWxH)	Qty/Carton	Carton Size (LxWxH)	G.W/Carton
LGL40.018	18W	-	3000/4000/6500	-	300x60mm	1	100x300x295mm	1.84 gr

\*3N Company has the right to make any changes it deems necessary without prior notice.  
\*Technical data has a tolerance of  $\pm 10\%$ .