



PLENUS



APPLICATION AREAS

Residence • Shops • Cafes • Restaurants • Offices • Training Halls • Hospitals • Facilities • Sports Facilities
It is ideal for use in areas that demand lights with high lumen and long lifespan.



PLENUS

LINEAR LUMINAIRE (DISCOUNT STORE)

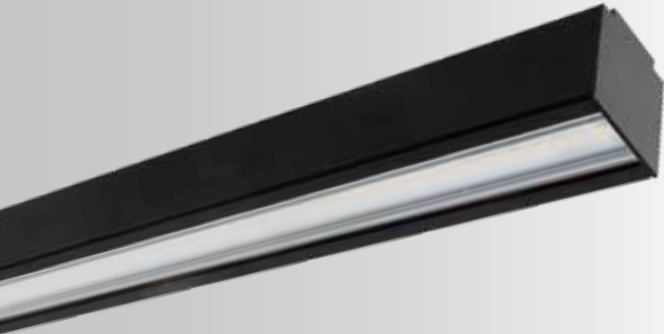

PRODUCT SPECIFICATIONS

- Body** : Alu Body/RAL9005
- Optic Cover** : Asymmetric-Double Asymmetric-90°
- Led Driver** : Osram-Tridonic-Philips-3N
- Led Chip** : Samsung, Osram, Seoul
- Input Voltage** : 220-240V/AC 50-60Hz
- Temperature Range** : -10°C~+40°C
- CRI** : CRI > 80
- IP Class** : IP40
- Options** : Body Color Options : RAL9003/RAL7021
Application Options : Surface/Pendant
Color Temperature : 3000K/4000K/6500K
Emergency Kit - DALI


50cm
3 METERS

It manufactures in 50 cm modular and extendable up to 3 mt.


125 LM/W

RAL7001 RAL9005 RAL9016

TECHNICAL DRAWING

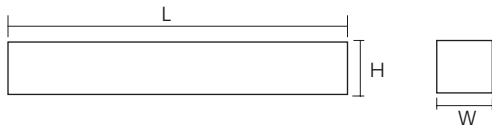


Asimetrik

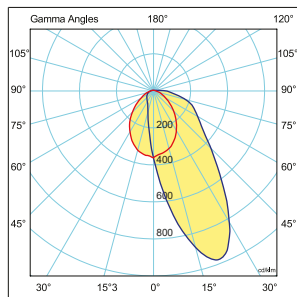

180.0 — 0.0
270.0 — 90.0


Double Asimetrik

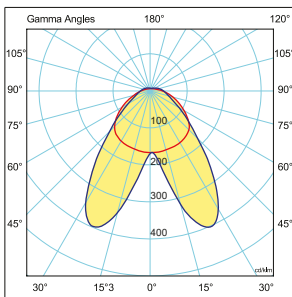

180.0 — 0.0
270.0 — 90.0

90°

PHOTOMETRIC DISTRIBUTION



180.0 — 0.0
270.0 — 90.0

ACCESSORIES

Joining Connector SP060.10.00011	Surface Mounting Kit R070.10.00002	U-Shape Mounting Kit SP060.10.00006
End Cap R010.10.00085	Energy Input R050.10.00002	1,2M. Suspension Wire C030.98.12001

PRODUCT SPECIFICATIONS

Item Code	Power (W)	Luminaire Lumen (lm)	Color Temperature (K)	Efficiency (lm/W)	Dimensions (LxWxH)	Qty/ Carton	Carton Size (LxWxH)	G.W/ Carton
LLN40.027	27W	3.375	3000/4000/6500	125lm/W	1000x40x45mm	16	1545x170x250mm	11.2 kg
LLN40.040	40W	5.000	3000/4000/6500	125lm/W	1000x40x45mm	16	1545x170x250mm	11.2 kg

*3N Company has the right to make any changes it deems necessary without prior notice.
*Technical data has a tolerance of ± 10%.