



RECTUS

APPLICATION AREAS

Shops • Cafes • Restaurants • Offices • Training Halls • Hospitals • Facilities • Sports Facilities
It is ideal for use in areas that demand lights with high lumen and long lifespan.



RECTUS


LINEAR LUMINAIRE (DISCOUNT STORE)



UGR
<19

560 mm

1120 mm



PRODUCT SPECIFICATIONS



- Body** : Alu Body/RAL9005
- Optic Cover** : Reflector Acrylic Lens 30°-55°-65°
- Led Driver** : Osram-Tridonic-Philips-3N
- Led Chip** : Samsung, Osram, Seoul
- Input Voltage** : 220-240V/AC 50-60Hz
- Temperature Range** : -10°C~+40°C
- CRI** : CRI > 80
- IP Class** : IP40
- Options** : Body Color Options: RAL9016/RAL7021
Reflector Color Options : RAL9005/RAL9003/RAL7021
Application Options : Surface/Pendant
Color Temperature : 3000K/4000K/6500K
Emergency Kit - DALI

28 cm
2.8
METERS
It manufactures in 28 cm modular and extendable up to 2.8 mt.

135
LM/W



TECHNICAL DRAWING

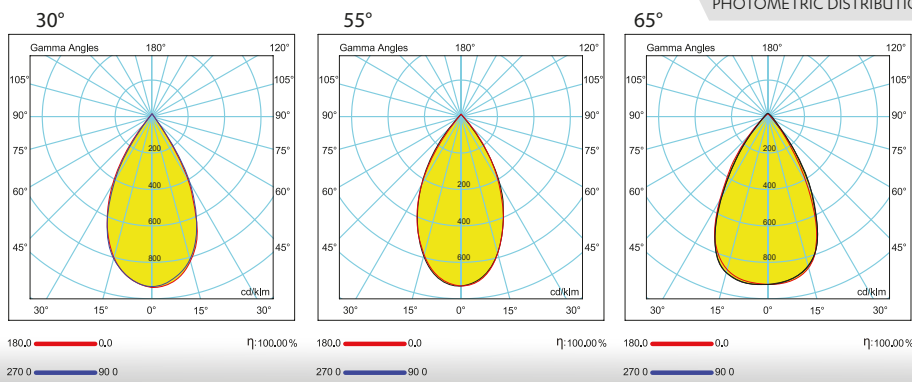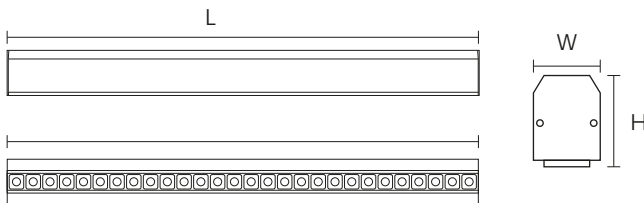

ACCESSORIES



OPTIMAL ACCESSORIES



PRODUCT SPECIFICATIONS

Item Code	Power (W)	Luminaire Lumen (lm)	Color Temperature (K)	Efficiency (lm/W)	Dimensions (LxWxH)	Qty/ Carton	Carton Size (LxWxH)	G.W/ Carton
LLN70.016	16W	2.150	3000/4000/6500	135lm/W	560x40x55mm	32	1545x170x250mm	-
LLL70.032	32W	4.300	3000/4000/6500	135lm/W	1120x40x55mm	16	1545x170x250mm	-

*3N Company has the right to make any changes it deems necessary without prior notice.
*Technical data has a tolerance of ± 10%.