

ROSE


AREAS OF APPLICATION

Shops • Cafes • Restaurants • Parking Lots • Offices • Training Halls • Hospitals
• Hangars • Warehouses • Factories • Facilities • Sports Facilities
Designed for use in environments that demand long-lasting and high lumen lighting.





ROSE WITH SENSOR

TRI-PROOF LUMINAIRE

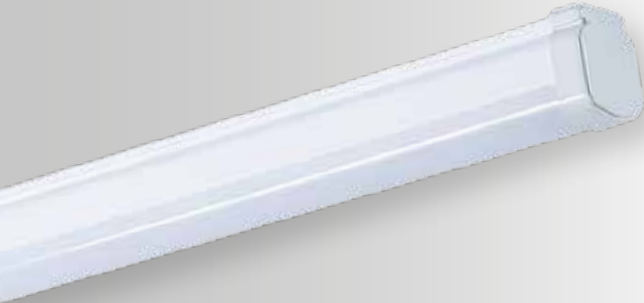


PRODUCT SPECIFICATIONS

- Body** : PC Body / RAL9003
- Optic Cover** : Opal PC Diffuser
- Driver** : DOB
- Led Chip** : Samsung, Osram, Seoul
- Input Voltage** : 220-240V/AC 50-60Hz
- Temperature Range** : -10°C~+40°C
- CRI** : CRI > 80
- IP Class** : IP65
- Options** : Application Options : Surface / Pendant
Color temperature : 3000K/4000K/6500K

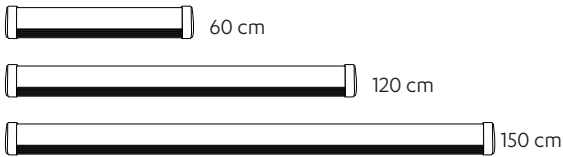

PHOTOMETRIC DISTRIBUTION



180.0 — 0.0 η: 100.00%
270.0 — 90.0

TECHNICAL DRAWING



ACCESSORIES



PRODUCT SPECIFICATIONS

Item Code	Power (W)	Luminaire Lumen (lm)	Color Temperature (K)	Efficiency (lm/W)	Dimensions (LxWxH)	Qty/Carton	Carton Size (LxWxH)	G.W/Carton
LET20.018	18W	1.800	3000/4000/6500	100lm/W	600x55x45mm	30	668x283x306mm	14.36 kg
LET20.036	36W	3.600	3000/4000/6500	100lm/W	1200x55x45mm	30	1268x283x306mm	14.36 kg
LET20.045	45W	4.500	3000/4000/6500	100lm/W	1500x55x45mm	30	1568x283x306mm	14.36 kg

*3N Company has the right to make any changes it deems necessary without prior notice.
*Technical data has a tolerance of ± 10%.