




T5 LED TUBE

AREAS OF APPLICATION

Shops • Cafes • Restaurants • Parking Lots • Offices • Training Halls • Hospitals
• Hangars • Warehouses • Factories • Facilities • Sports Facilities
Suitable for use in the areas requiring long-lasting and high lumen lighting.




T5 LED TUBE ALUMINUM BODY

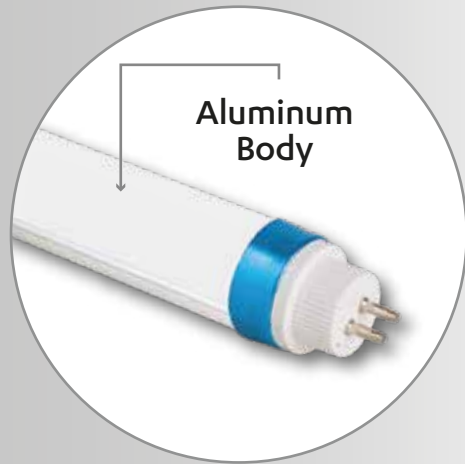


PRODUCT SPECIFICATIONS


- Body** : Aluminum Body/PC Cover
- Optic** : Opal PC Diffuser
- Driver** : 3N
- Led Chip** : Osram-Samsung-Seoul
- Input Voltage** : 220-240V/AC 50-60Hz
- Temperature Range** : -10°C~+40°C
- CRI** : CRI > 80
- IP Class** : IP40
- Options** : Color Temperature : 3000K/4000K/6500K
Emergency Kit - Single Side - Double Side

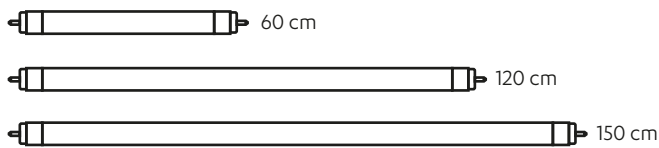

PHOTOMETRIC DISTRIBUTION

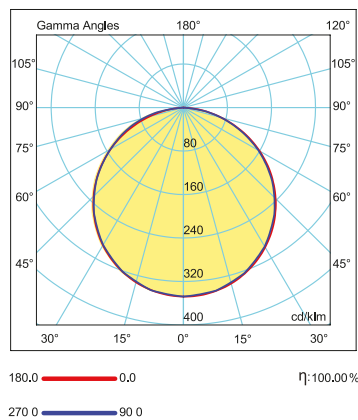

TECHNICAL DRAWING

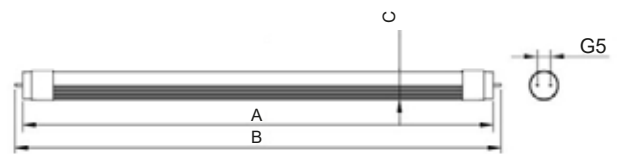

600mm	A=549mm	B=563.2mm	C=Ø21mm
1200mm	A=1149mm	B=1163.2mm	C=Ø21mm
1500mm	A=1449mm	B=1463.2mm	C=Ø21mm

PRODUCT SPECIFICATIONS

Item Code	Power (W)	Luminaire Lumen (lm)	Color Temperature (K)	Efficiency (lm/W)	Dimensions (LxWxH)	Qty/Carton	Carton Size (LxWxH)	G.W/Carton
LFL30.009	9W	900	3000/4000/6500	100lm/W	600x21mm	20	640x180x340mm	2.5 kg
LFL30.018	18W	1.800	3000/4000/6500	100lm/W	1200x21mm	20	1250x230x190mm	5.4 kg
LFL30.024	24W	2.400	3000/4000/6500	100lm/W	1500x21mm	20	1530x150x130mm	6.8 kg

*3N Company has the right to make any changes it deems necessary without prior notice.
*Technical data has a tolerance of ±10%.