



**Aluminum
Body**

**Pet Coated
Glass**

**Opal Glass
Body**

**PC
Body**

T8 LED TUBE

AREAS OF APPLICATION

Shops • Cafes • Restaurants • Parking Lots • Offices • Training Halls • Hospitals
• Hangars • Warehouses • Factories • Facilities • Sports Facilities
Suitable for use in the areas requiring long-lasting and high lumen lighting.




T8 LED TUBE HIGH LUMEN




PRODUCT SPECIFICATIONS


Body	: PET Coated Glass
Optic	: Opal PET Coated
Driver	: 3N
Led Chip	: Osram-Samsung-Seoul
Input Voltage	: 220-240V/AC 50-60Hz
Temperature Range	: -10°C~+40°C
CRI	: CRI > 80
IP Class	: IP40
Options	: Color Temperature : 3000K/4000K/6500K Emergency Kit - Single Side - Double Side



PHOTOMETRIC DISTRIBUTION

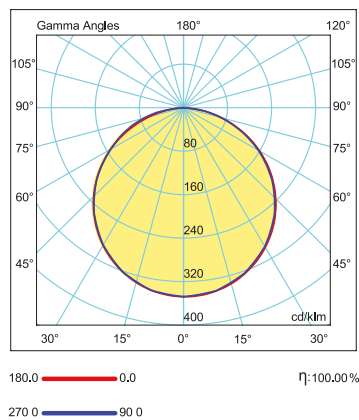

TECHNICAL DRAWING

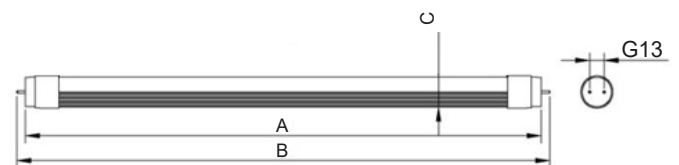

1200mm	A=1198mm	B=1213mm	C=Ø25.8 mm
1500mm	A=1498mm	B=1513mm	C=Ø25.8 mm

PRODUCT SPECIFICATIONS

Item Code	Power (W)	Luminaire Lumen (lm)	Color Temperature (K)	Efficiency (lm/W)	Dimensions (LxWxH)	Qty/Carton	Carton Size (LxWxH)	G.W/Carton
LFL10.015	15W	1.950	3000/4000/6500	130lm/W	1200x25.8mm	20	1260x180x140mm	6.10 kg
LFL10.022	22W	2.860	3000/4000/6500	130lm/W	1200x25.8mm	40	1260x180x140mm	6.10 kg
LFL10.015	15W	2.400	3000/4000/6500	160lm/W	1500x25.8mm	40	1580x200x320mm	14.20 kg
LFL10.022	22W	3.520	3000/4000/6500	160lm/W	1500x25.8mm	40	1580x200x320mm	14.20 kg

*3N Company has the right to make any changes it deems necessary without prior notice.
*Technical data has a tolerance of ±10%.