





VIOLET

AREAS OF APPLICATION

Shop • Cafes • Restaurants • Parking Lots • Offices • Training Halls • Hospital • Factory • Facility
Designed to use in the areas requiring long-lasting and high lumen lighting.




VIOLET 60x60

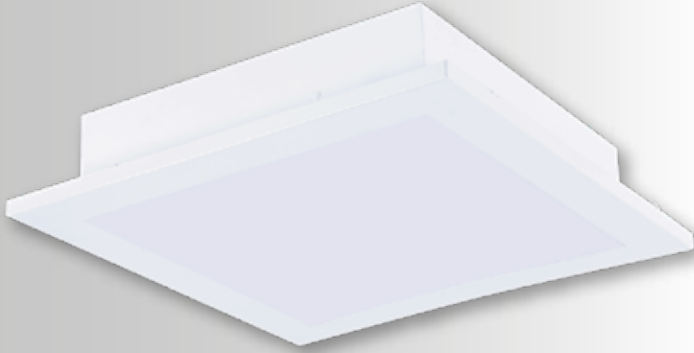

PRODUCT SPECIFICATIONS


Body	: Dkp Steel Sheet / RAL9003
Optic Cover	: PMMA Opal Diffuser
Driver	: Osram-Tridonic-Philips-3N
Led Chip	: Samsung, Osram, Seoul
Input Voltage	: 220-240V/AC 50-60Hz
Temperature Range	: -10°C~+40°C
CRI	: CRI > 80
IP Class	: IP40
Options	: Application Option: Plaster Ceiling/Suspended Ceiling/ Clip In Mounted/Surface Mounted Color Temperature : 3000K/4000K/6500K Emergency Kit - DALI

PHOTOMETRIC DISTRIBUTION

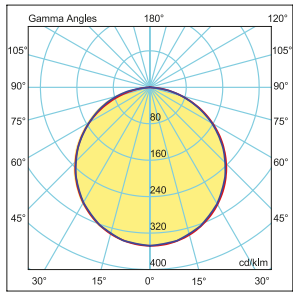

180.0 0.0
270.0 90.0
η: 100.00%


TECHNICAL DRAWING

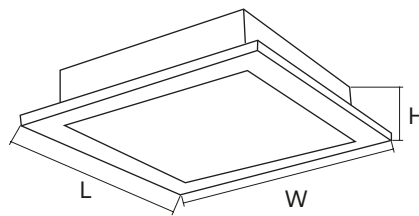

ACCESSORY FOR PLASTER CEILING



PLASTER CEILING HOLE SIZE

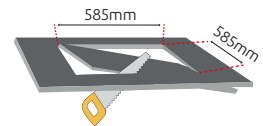

PRODUCT SPECIFICATIONS

Item Code	Power (W)	Luminaire Lumen (lm)	Color Temperature (K)	Efficiency (lm/W)	Dimensions (LxWxH)	Qty/Carton	Carton Size (LxWxH)	G.W/Carton
LOF20.036 / Plaster	36W	3.600	3000/4000/6500	100lm/W	595x595x60mm	5	620x640x450mm	19.4 kg
LOF20.036 / Stonewool	36W	3.600	3000/4000/6500	100lm/W	595x595x60mm	5	620x640x450mm	19.4 kg
LOF20.036 / Surface M.	36W	3.600	3000/4000/6500	100lm/W	600x600x60mm	5	620x640x450mm	19.4 kg
LOF20.036 / Clip In	36W	3.600	3000/4000/6500	100lm/W	600x600x60mm	5	620x640x450mm	19.4 kg

*3N Company has the right to make any changes it deems necessary without prior notice.
*Technical data has a tolerance of ± 10%.