




VIOLET

AREAS OF APPLICATION

Shop • Cafes • Restaurants • Parking Lots • Offices • Training Halls • Hospital • Factory • Facility
Designed to use in the areas requiring long-lasting and high lumen lighting.





VIOLET ARCHITECTURAL-L

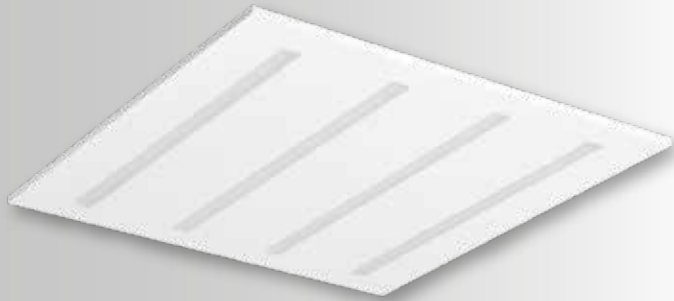


PRODUCT SPECIFICATIONS

- Body** : Dkp Steel Sheet / RAL9003
- Optic Cover** : Asymmetric-Double Asymmetric-90°
- Driver** : Osram-Tridonic-Philips-3N
- Led Chip** : Samsung, Osram, Seoul
- Input Voltage** : 220-240V/AC 50-60Hz
- Temperature Range** : -10°C~+40°C
- CRI** : CRI > 80
- IP Class** : IP40
- Options** : Application Options :
Plaster Ceiling/Suspended Ceiling/
Clip In Mounted/Surface Mounted
Color Temperature : 3000K/4000K/6500K
Emergency Kit - DALI


TECHNICAL DRAWING



RAL7001



RAL9005



RAL9003


ACCESSORY FOR PLASTER CEILING

Plaster Ceiling Spring Clip




R070.30.00150

PLASTER CEILING HOLE SIZE



PHOTOMETRIC DISTRIBUTION

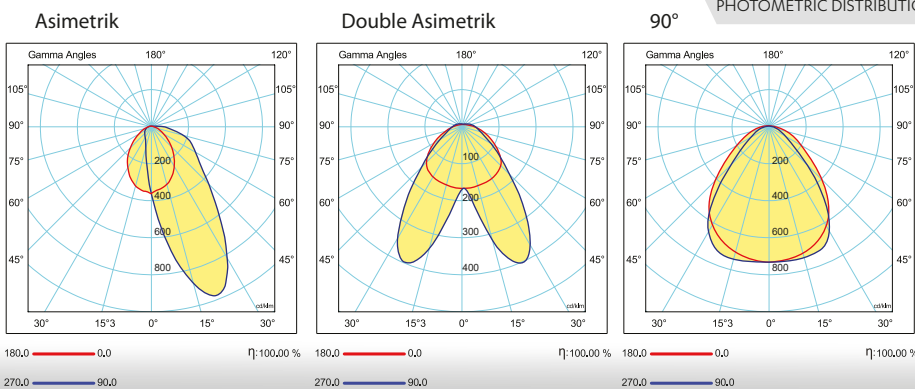

PRODUCT SPECIFICATIONS

Item Code	Power (W)	Luminaire Lumen (lm)	Color Temperature (K)	Efficiency (lm/W)	Dimensions (LxWxH)	Qty/Carton	Carton Size (LxWxH)	G.W/Carton
LOF50.040	40W	5.000	3000/4000/6500	125lm/W	595x595x30mm	10	620x640x450mm	19.2 kg
LOF50.057	57W	7.125	3000/4000/6500	125lm/W	595x595x30mm	10	620x640x450mm	19.2 kg

*3N Company has the right to make any changes it deems necessary without prior notice.
*Technical data has a tolerance of ± 10%.