



VIOLET STERILIZED

APPLICATION AREAS


Hospitals • Laboratories • Cleanrooms

Designed to use in the areas requiring long-lasting and high lumen lighting.



VIOLET STERILIZED

STERILIZED CLEANROOM LUMINAIRES

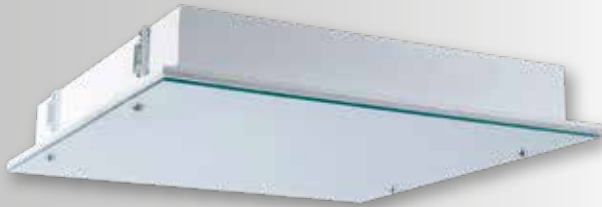

DUST & DIRT
PROTECTION




PRODUCT SPECIFICATIONS

- Body** : Dkp Steel Sheet / RAL9003
- Optic Cover** : PMMA Opal Diffuser/4mm Tempered Glass
- Driver** : Osram-Tridonic-Philips-3N
- Led Chip** : Samsung, Osram, Seoul
- Input Voltage** : 220-240V/AC 50-60Hz
- Temperature Range** : -10°C~+40°C
- CRI** : CRI > 80
- IP Class** : IP65
- Options** : Application Options :
Plaster/Suspended/Clip In Ceiling
Color Temperature : 3000K/4000K/6500K
Emergency Kit - DALI




PHOTOMETRIC DISTRIBUTION

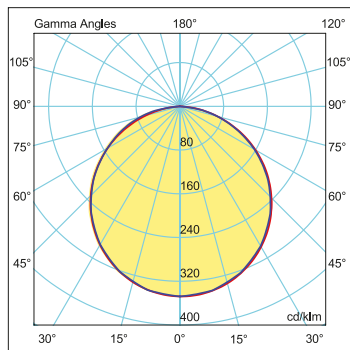

180,0 — 0,0 η :100,00%

270 0 — 90 0


TECHNICAL DRAWING

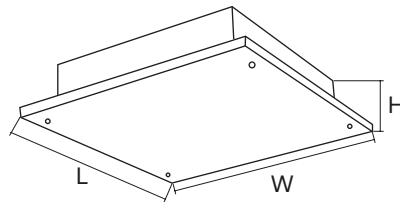

ACCESSORY FOR PLASTER CEILING



PLASTER CEILING HOLE SIZE



PRODUCT SPECIFICATIONS

Item Code	Power (W)	Luminaire Lumen (lm)	Color Temperature (K)	Efficiency (lm/W)	Dimensions (LxWxH)	Qty/Carton	Carton Size (LxWxH)	G.W/Carton
LOF30.040 / Plaster	36W	3.240	3000/4000/6500	90lm/W	595x595x80mm	4	620x640x450mm	19.2 kg
LOF30.040 / Stonewool	36W	3.240	3000/4000/6500	90lm/W	595x595x80mm	4	620x640x450mm	19.2 kg
LOF30.040 / Surface M.	36W	3.240	3000/4000/6500	90lm/W	600x600x80mm	4	620x640x450mm	19.2 kg
LOF30.040 / Clip In	36W	3.240	3000/4000/6500	90lm/W	600x600x80mm	4	620x640x450mm	19.2 kg

*3N Company has the right to make any changes it deems necessary without prior notice.
*Technical data has a tolerance of $\pm 10\%$.