



WALLS

APPLICATION AREAS

Historical Building • Street • Bridge • Indoor Walls • Outdoor Walls



WALLS


LANDSCAPE AND FACADE LUMINAIRES

PRODUCT SPECIFICATIONS

- Body** : Alu Body/Anodized
- Optic Cover** : 10°/25°/30°/45°/10°x45° PMMA Lens
- Led Driver** : Osram-Tridonic-Philips-3N
- Led Chip** : Samsung, Osram, Seoul
- Input Voltage** : 220-240V/AC 50-60Hz
- Temperature Range** : -20°C~+40°C
- CRI** : CRI > 80
- IP Class** : IP65
- IK Code** : IK09
- Options** : Color Temperature : 3000K/4000K/6500K/
Amber/Red/Green/Blue
DALI-RGB CONTROL-DMX




TECHNICAL DRAWING



ACCESSORIES



PHOTOMETRIC DISTRIBUTION

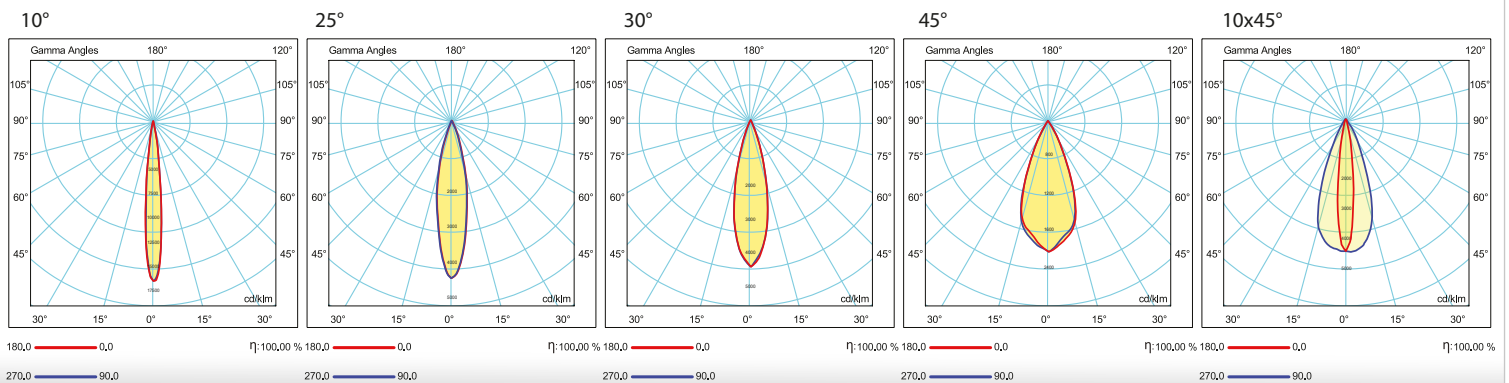

PRODUCT SPECIFICATIONS

Item Code	Power (W)	Luminaire Lumen (lm)	Color Temperature (K)	Efficiency (lm/W)	Dimensions (LxWxH)	Qty/Carton	Carton Size (LxWxH)	G.W/Carton
LPC10.09	9W	900	3000K/4000K/6500K/RGB	100lm/W	230x176x29mm	1	234.4x231.4x32.4mm	1 kg
LPC10.18	18W	1.800	3000K/4000K/6500K/RGB	100lm/W	301x227x33mm	1	318.4x280.4x51.4mm	1.75 kg
LPC10.36	36W	3.600	3000K/4000K/6500K/RGB	100lm/W	346x256x34mm	1	355.4x331.4x53.4mm	2.50 kg

*3N Company has the right to make any changes it deems necessary without prior notice.
*Technical data has a tolerance of ±10%.